

**HILO**  
High Quality Low Price

**TNR**  
TAKE A NEW ROAD

# HILO HLG01



*Maximize Service Life For Rigid Dump Trucks*

# HLC01 Technical Data



Size	Star Rating	Load Index	TRA Code	Tread Depth (mm)	Type	Standard Rim (Rim Width & Flange)	Diameter (mm)	Section Width (mm)	Max Load (kg)	Standard Pressure (bar)	Max Speed (km)
27.00R49	★★	223	E-4	58	TL	19.50/4.0	2702	737	27250	7	50
33.00R51	★★	235	E-4	80	TL	24.00/5.0	3061	894	38750	7	50
36.00R51	★★	241	E-4	88	TL	26.00/5.0	3233	988	46250	7	50

## Tire Compound and corresponding TKPH

Size	Compound	C2	C1	R1	CS	H1	H2
27.00R49	TKPH	340	355	390	440	480	510
33.00R51	TKPH	420	441	460	485	710	750
36.00R51	TKPH	390	410	430	450	660	680

**C2:** Super Cut-resistance Compound


**C1:** Cut-resistance Compound

**CS:** High Speed Cut-resistance Compound

**R1:** Regular Compound

**H1:** High Speed Compound

**H2:** Heat Resistance Compound

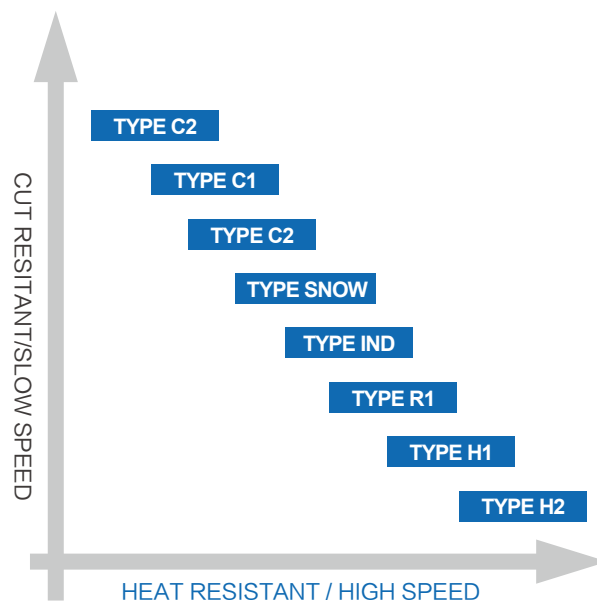

# HLC01 Pattern Characteristics

## Application:

Suitable for mines with low heat generation.

**Solid centerline section design helps provide long wear and smooth ride.**

**The Zig-zag grooves non-directional tread design and tapered shoulder lugs for superior traction ability.**

**Aggressive lug design helps provide premium performance in harsh road conditions.**

